




## Automotive single line ESD protection for high speed lines in 0402



SOD882T(0402)  
(QFN-2L 1.0 x 0.6 x 0.35)



### Features

- AEC-Q101 qualified 
- Flow-through routing to keep signal integrity
- Ultra large bandwidth: 12 GHz
- Ultra low capacitance: 0.4 pF
- Extended operating junction temperature range: -55 °C to 150 °C
- RoHS compliant
- Complies with ISO 10605 - C = 150 pF, R = 330 Ω
  - ±16 kV (contact discharge)
  - ±30 kV (air discharge)
- Complies with ISO 10605 - C = 330 pF, R = 330 Ω
  - ±12 kV (contact discharge)
  - ±30 kV (air discharge)
- Complies with ISO 7637-3:
  - pulse 3a:  $V_s = -150\text{ V}$
  - pulse 3b:  $V_s = +150\text{ V}$
  - pulse 2a:  $V_s = \pm 85\text{ V}$

### Application

The ESDAXLC6-1BT2Y is designed to protect against electrostatic discharge on automotive circuits such as:

- APIX
- LVDS & digital video interface
- Ethernet and BroadrReach
- USB 2.0 and USB 3.0
- High speed communication buses
- RF front-end

### Description

The ESDAXLC6-1BT2Y is an ESD device designed for high-speed lines protection.

Product status link

[ESDAXLC6-1BT2Y](#)


# 1 Characteristics

**Table 1. Absolute maximum ratings ( $T_{amb} = 25\text{ }^{\circ}\text{C}$ )**

Symbol	Parameter	Value	Unit	
$V_{PP}$	Peak pulse voltage	ISO10605 / IEC 61000-4-2 (C = 150 pF, R = 330 $\Omega$ ):	kV	
		Contact discharge		16
		Air discharge		30
		ISO10605 (C = 330 pF, R = 330 $\Omega$ )		
	Contact discharge	12		
	Air discharge	30		
$P_{PP}$	Peak pulse power dissipation (8/20 $\mu\text{s}$ )	40	W	
$I_{PP}$	Peak Pulse current (8/20 $\mu\text{s}$ )	1.3	A	
$T_{stg}$	Storage temperature range	-65 to +150	$^{\circ}\text{C}$	
$T_j$	Operating junction temperature range	-55 to +150	$^{\circ}\text{C}$	
$T_L$	Maximum lead temperature for soldering during 10 s	260	$^{\circ}\text{C}$	

**Figure 1. Electrical characteristics (definitions)**


Symbol	Parameter
$V_{BR}$	= Breakdown voltage
$V_{RM}$	= Stand-off voltage
$V_{CL}$	= Clamping voltage
$I_{RM}$	= Leakage current at $V_{RM}$
$I_{PP}$	= Peak pulse current
$R_d$	= Dynamic impedance
$C_{LINE}$	= Input capacitance per line

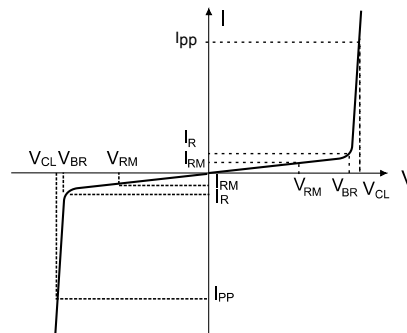
**Table 2. Electrical characteristics (values) ( $T_{amb} = 25\text{ }^{\circ}\text{C}$ )**


Symbol	Test conditions	Min.	Typ.	Max.	Unit
$V_{BR}$	$I_R = 1\text{ mA}$	6	9	11	V
$I_R$	$V_R = 3\text{ V}$			50	nA
$V_{CL}$	$I_{PP} = 1\text{ A}$ , 8/20 $\mu\text{s}$			17	V
	ISO 10605- C = 150 pF, R = 330 $\Omega$ +8 kV contact discharge, measured at 30 ns		37		
	TLP, pulse duration 100 ns, 16 A		41		
$R_d$	TLP, pulse duration 100 ns, 16 A		2		$\Omega$
$C_{I/O-GND}$	$V_{I/O} = 0\text{ V}$ , 200 MHz < f < 3 GHz, $V_{OSC} = 30\text{ mV}$		0.4	0.5	pF
$f_C$	$S_{21} = -3\text{ dB}$		12		GHz

## 1.1 Characteristics (curves)


**Figure 2. Leakage current versus junction temperature**

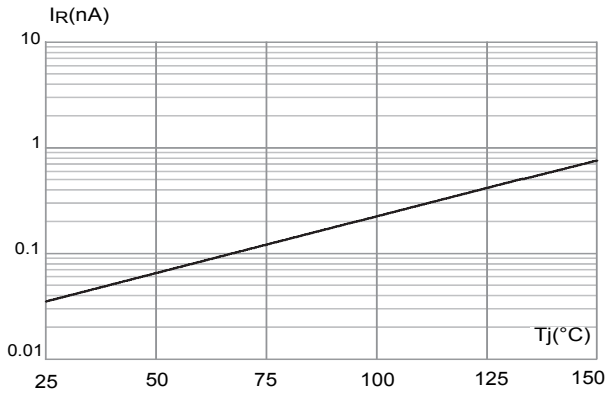


**Figure 3. Junction capacitance versus reverse applied voltage**

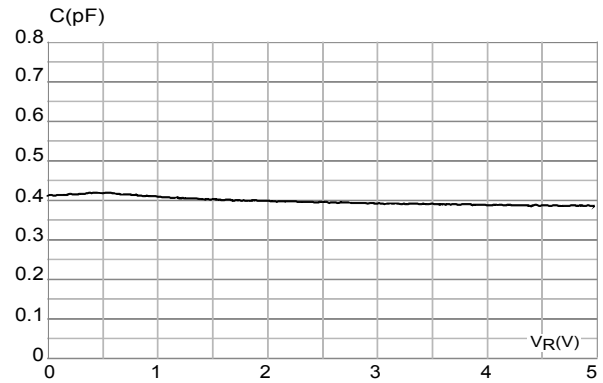


**Figure 4. TLP**

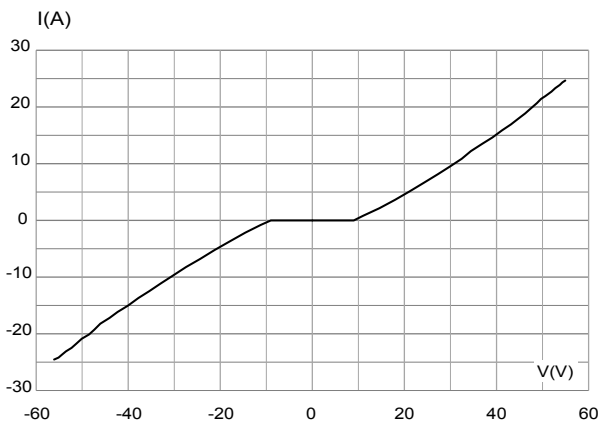


**Figure 5. S21 attenuation**

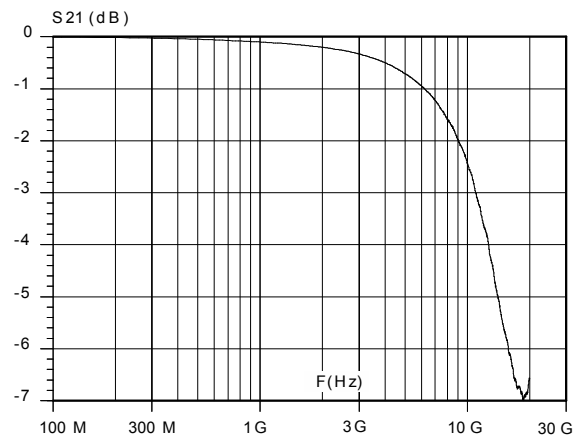


**Figure 6. ESD response to ISO 10605 - C = 150 pF, R = 330 Ω (-8 kV contact discharge)**

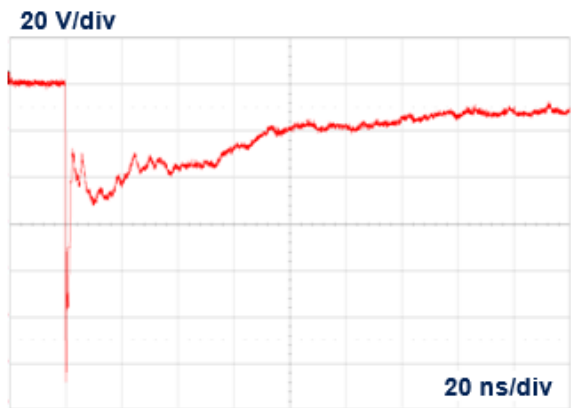


**Figure 7. ESD response to ISO 10605 - C = 150 pF, R = 330 Ω (+8 kV contact discharge)**

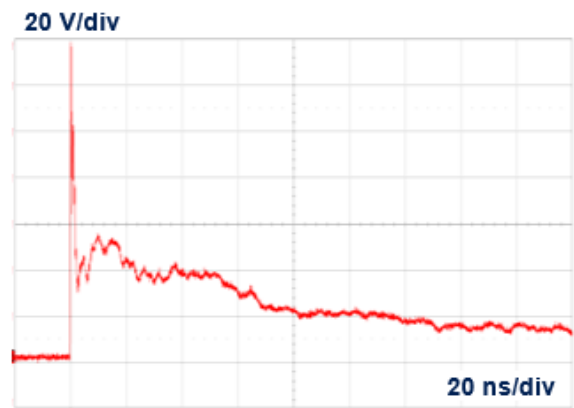


**Figure 8. ESD response to ISO 7637-3 pulse 3a: -150 V**

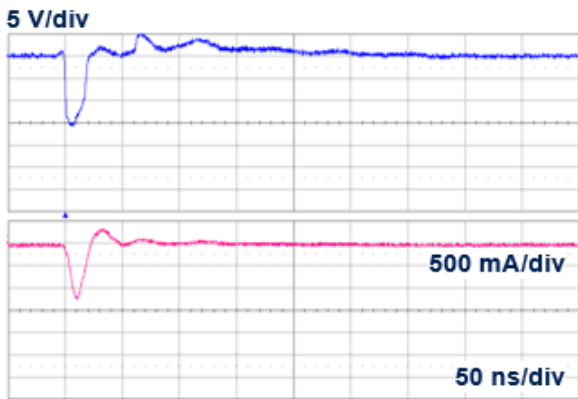


**Figure 9. ESD response to ISO 7637-3 pulse 3b: +150 V**

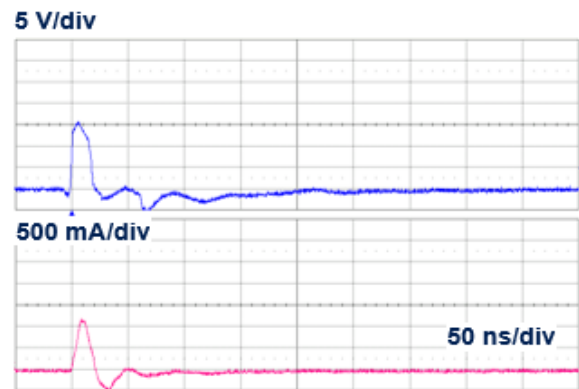


**Figure 10. ESD response to ISO 7637-3 pulse 2a: -85 V**

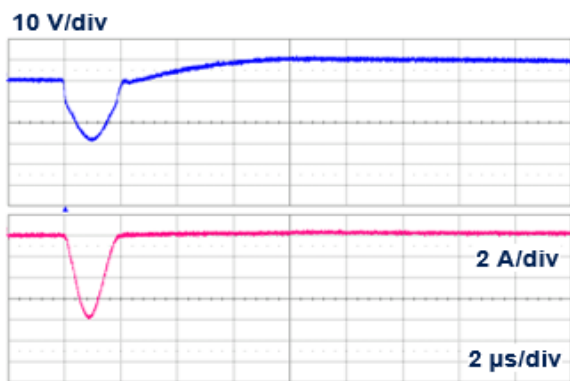

**Figure 11. ESD response to ISO 7637-3 pulse 2a: +85 V**

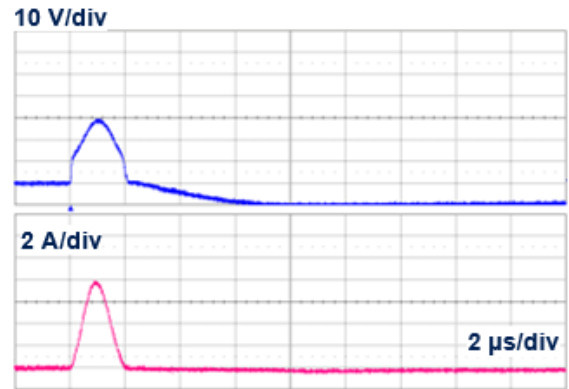

**Figure 12. H2 harmonic versus input power at 710 MHz**

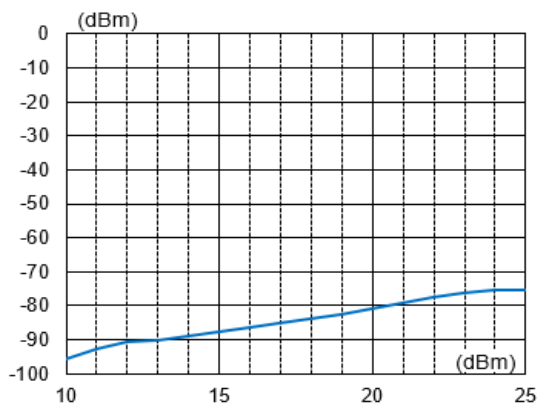

**Figure 13. H3 harmonic versus input power at 710 MHz**

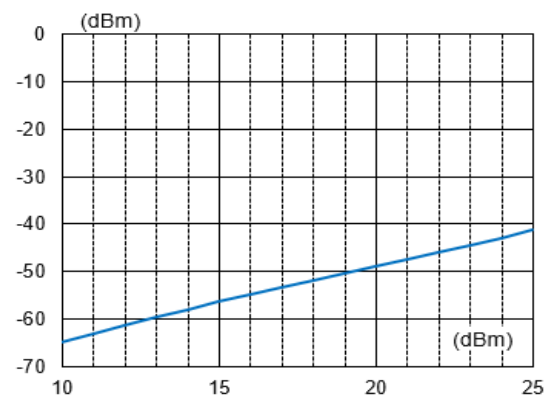


Figure 14. H2 harmonic versus input power at 824 MHz

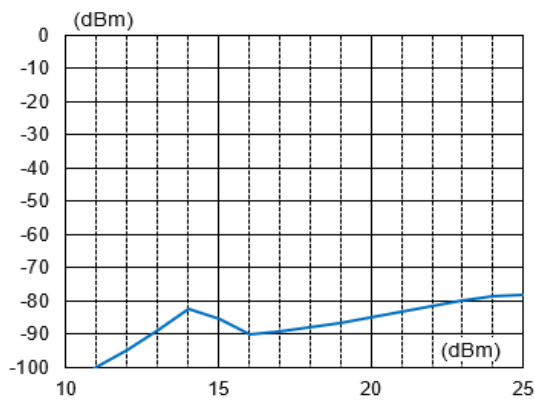


Figure 15. H3 harmonic versus input power at 824 MHz

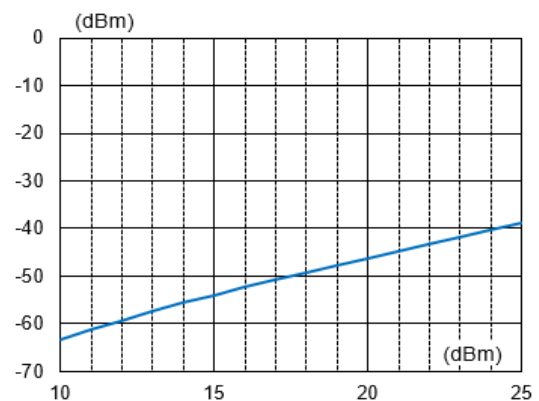


Figure 16. H2 harmonic versus input power at 2400 MHz


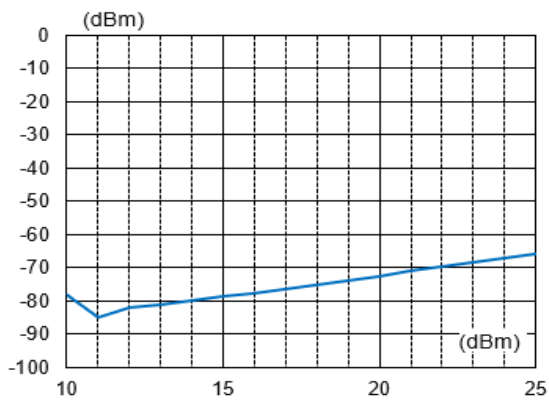


Figure 17. H3 harmonic versus input power at 2400 MHz

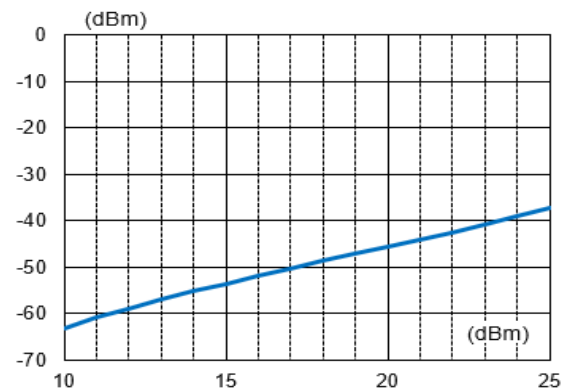


## 2 Package information

In order to meet environmental requirements, ST offers these devices in different grades of **ECOPACK** packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK is an ST trademark.

### 2.1 Package information

**Figure 18. Package outline**

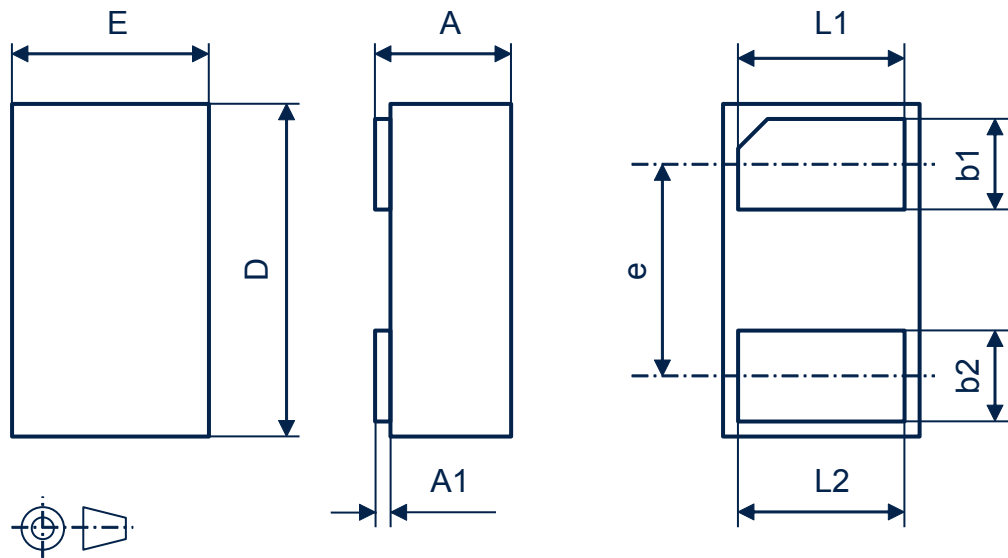


**Table 3. Package mechanical data**

Ref.	Dimensions		
	Millimeters		
	Min.	Typ.	Max.
A	0.30		0.40
A1	0.00		0.05
L1	0.45	0.50	0.55
L2	0.45	0.50	0.55
D	0.95	1.00	1.05
E	0.55	0.60	0.65
e	0.60	0.65	0.70
b1	0.20	0.25	0.30
b2	0.20	0.25	0.30


## 2.2 Packing and marking information

**Figure 19. Marking layout**

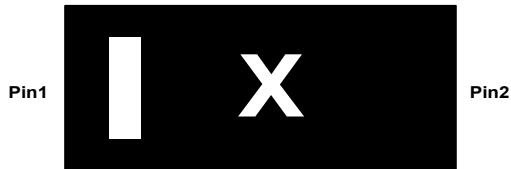

**X:** Refer to ordering information table for marking.


**Figure 20. Package orientation in reel**

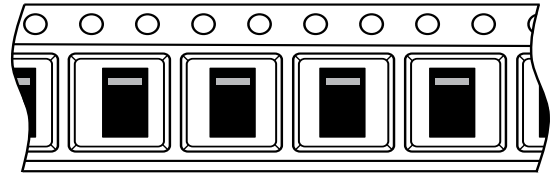


Taped according to EIA-481

Note: Pocket dimensions are not on scale  
Pocket shape may vary depending on package  
On bidirectional devices, marking and logo may be not always in the same direction


**Figure 21. Tape leader and trailer dimensions**

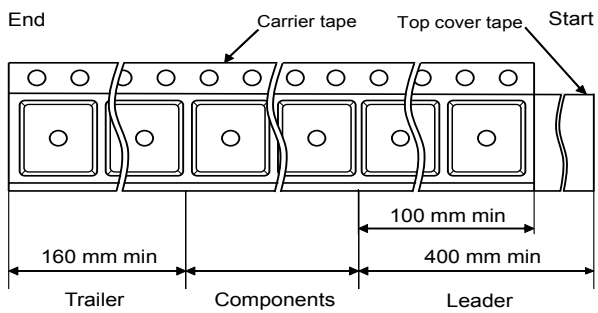


**Figure 22. Tape and reel orientation**

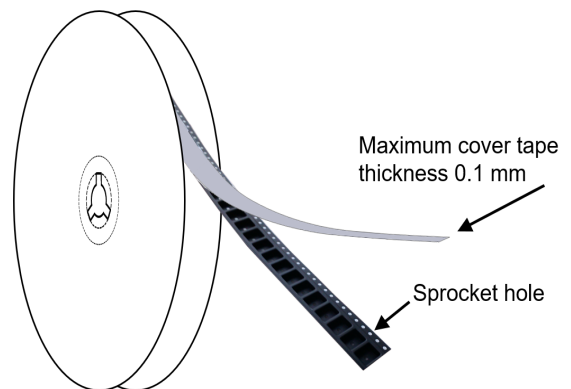


**Figure 23. Reel dimensions (mm)**

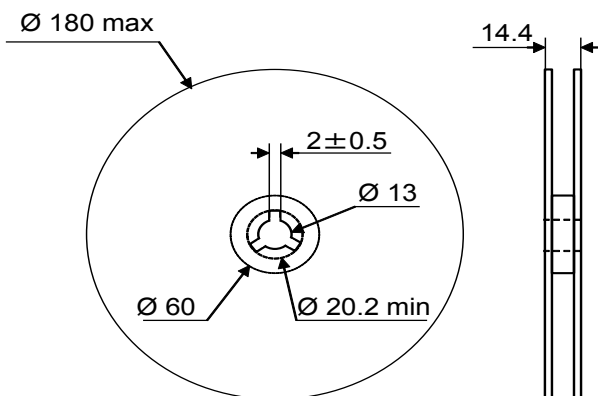

**Figure 24. Inner box dimensions (mm)**

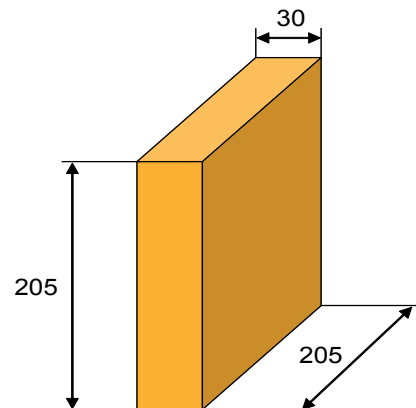

**Figure 25. Tape outline**

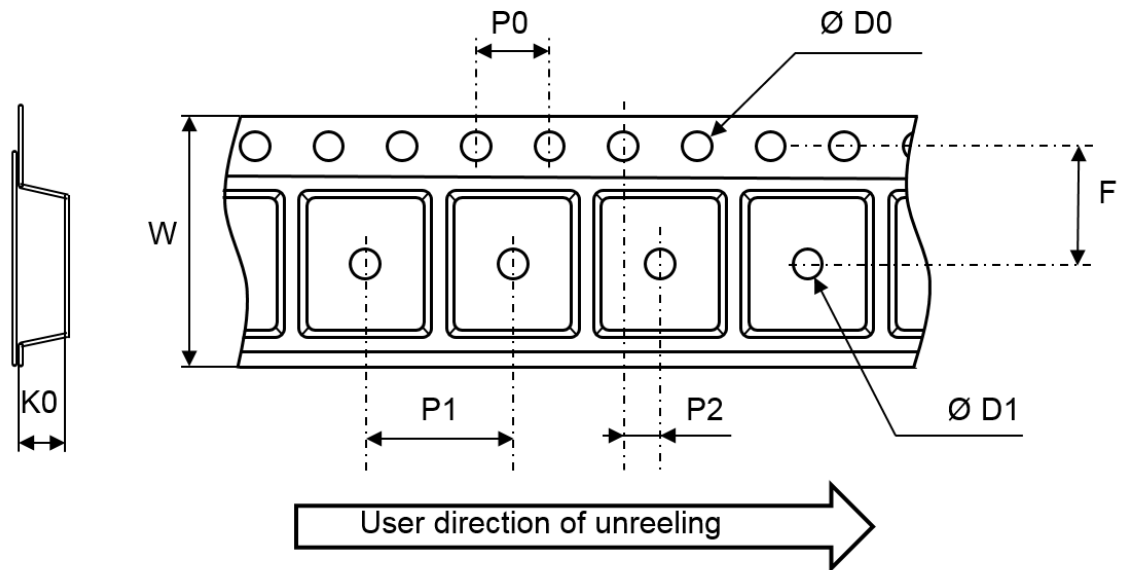

Note: Pocket dimensions are not on scale  
Pocket shape may vary depending on package

**Table 4. Tape and reel mechanical data**


Ref.	Dimensions		
	Millimeters		
	Min.	Typ.	Max.
D0	1.45	1.5	1.6
D1	0.35		
F	3.45	3.5	3.55
K0	0.42	0.47	0.52
P0	3.9	4	4.1
P1	1.95	2	2.05
P2	1.95	2	2.05
W	7.9	8	8.3



### 3 Assembly recommendations

#### 3.1 Recommended footprint

Figure 26. Recommended footprint in mm

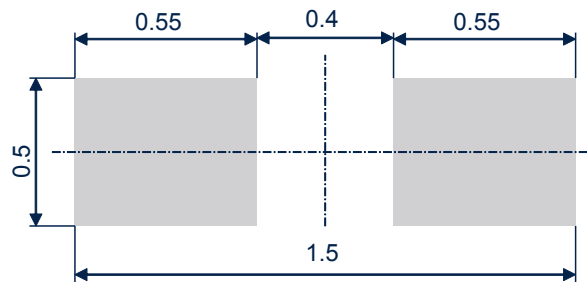


Note: Solder mask defined (SMD) recommended.

#### 3.2 Stencil opening design

Stencil opening thickness: 75  $\mu\text{m}$  / 3 mils

Figure 27. Stencil opening recommendations

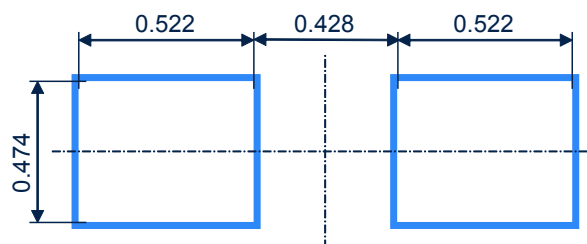

#### 3.3 Solder paste

1. Halide-free flux, qualification ROL0 according to ANSI/J-STD-004.
2. "No clean" solder paste recommended.
3. Tack force high enough to resist component displacement during PCB movement.
4. Particles size 20-38  $\mu\text{m}$  per IPCJ STD-005.

### 3.4 Placement


1. It is recommended to use leads recognition instead of package outline for accurate placement on footprint with adequate resolution tool.
2. Tolerance of  $\pm 50 \mu\text{m}$  (25% offset allowed on the smallest dimension of the smallest pad) is recommended.
3. 1.0 N placement force is recommended. Too much placement force can lead to squeezed out solder paste and cause solder joints to short. Too low placement force can lead to insufficient contact between package and solder paste that could cause open solder joints or badly centered packages.
4. For assembly, a perfect supporting of the PCB (all the more on flexible PCB) is recommended during solder paste printing, pick and place and reflow soldering by using optimized tools.

### 3.5 PCB design preference

1. Any via around or inside the footprint area must be closed to avoid solderpaste migration in the via.
2. Position and dimensions of the tracks should be well balanced. A symmetrical layout is recommended to prevent assembly troubles.

### 3.6 Reflow profile


**Figure 28. ST ECOPACK recommended soldering reflow profile for PCB mounting**

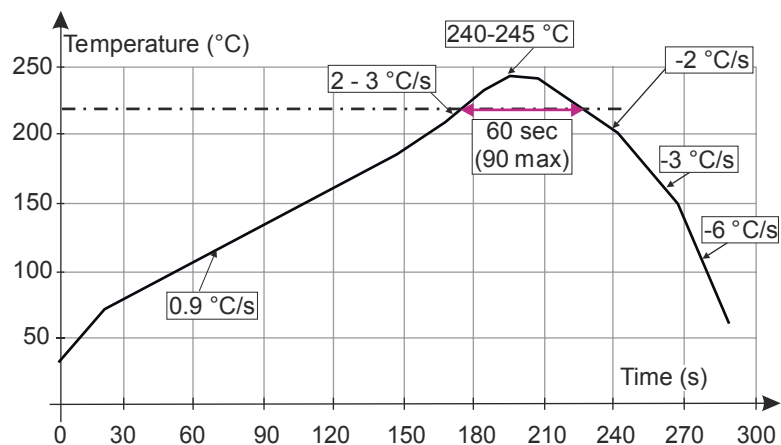

**Note:** Minimize air convection currents in the reflow oven to avoid component movement.  $O_2$  rate inside the oven must be below 500 ppm. Maximum soldering profile corresponds to the latest IPC/JEDEC J-STD-020.

## 4 Ordering information

**Figure 29. Ordering information scheme**

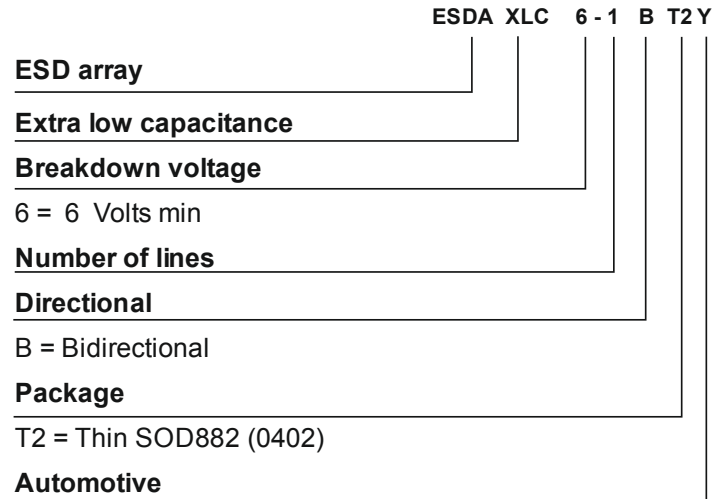

**Table 5. Ordering information**

Order code	Marking <sup>(1)</sup>	Package	Weight	Base qty.	Delivery mode
ESDAXLC6-1BT2Y	U	SOD882T (0402)	0.80 mg	12000	Tape and reel

1. The marking can be rotated by multiples of 90° to differentiate assembly location

## Revision history

**Table 6. Document revision history**

Date	Version	Changes
03-Nov-2014	1	Initial release.
03-May-2021	2	Updated SOD882T (0402) package information. Minor text changes.

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, please refer to [www.st.com/trademarks](http://www.st.com/trademarks). All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2021 STMicroelectronics – All rights reserved