

## General Description

The AOZ8831ADI-05 is an ultra low capacitance one-line bidirectional transient voltage suppressor diode designed to protect high speed data lines and voltage sensitive electronics from high transient conditions and ESD.

This device incorporates one bidirectional TVS diode in an ultra-small DFN 1.0x0.6 footprint package. It may be used to meet the ESD immunity requirements of IEC 61000-4-2, Level 4 ( $\pm 15\text{kV}$  air,  $\pm 15\text{kV}$  contact discharge).

The AOZ8831ADI-05 comes in an RoHS compliant package and is rated over a  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$  ambient temperature range.

The ultra-small  $1.0 \times 0.6 \times 0.5\text{mm}$  DFN package makes it ideal for applications where PCB space is a premium. The small size and high ESD protection makes it ideal for protecting voltage sensitive electronics from high transient conditions and ESD.

## Features


- ESD protection for high-speed data lines:
  - Exceeds: IEC 61000-4-2 (ESD),  $\pm 25\text{kV}$  (contact),  $\pm 30\text{kV}$  (air)
  - Human Body Model (HBM)  $\pm 25\text{kV}$
- Small package saves board space
- Ultra low capacitance:  $0.30\text{pF}$
- Low clamping voltage
- Low operating voltage:  $5.0\text{V}$
- Pb-free device

## Applications

- Portable handheld devices
- Keypads, data lines, buttons
- Notebook computers
- Digital cameras
- Portable GPS
- MP3 players



## Typical Application

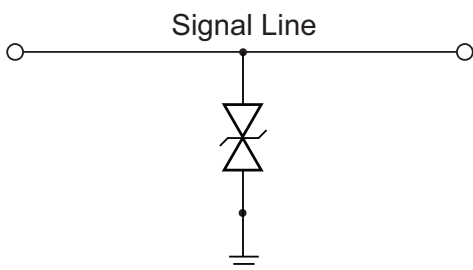

**Bidirection Protection of Single Line**

## Pin Configuration



## Ordering Information

Part Number	Ambient Temperature Range	Package	Environmental
AOZ8831ADI-05	-40°C to +85°C	DFN 1.0 x 0.6	Green Product RoHS Compliant



AOS Green Products use reduced levels of Halogens, and are also RoHS compliant. Please visit [www.aosmd.com/media/AOSGreenPolicy.pdf](http://www.aosmd.com/media/AOSGreenPolicy.pdf) for additional information.

## Absolute Maximum Ratings

*Exceeding the Absolute Maximum Ratings may damage the device.*

Parameter	Rating
VP – VN	5V
Peak Pulse Current ( $I_{PP}$ ), $t_p = 8/20\mu s$	2.5A
Peak Pulse Power, $t_p = 8/20\mu s$	40W
Storage Temperature ( $T_S$ )	-65°C to +150°C
ESD Rating per IEC61000-4-2, Contact <sup>(1)</sup>	±25kV
ESD Rating per IEC61000-4-2, Air <sup>(1)</sup>	±30kV
ESD Rating per Human Body Model <sup>(2)</sup>	±25kV

### Notes:

- IEC 61000-4-2 discharge with  $C_{Discharge} = 150pF$ ,  $R_{Discharge} = 330\Omega$ .
- Human Body Discharge per MIL-STD-883, Method 3015  $C_{Discharge} = 100pF$ ,  $R_{Discharge} = 1.5k\Omega$ .

## Maximum Operating Conditions

*The device is not guaranteed to operate beyond the Maximum Operating Conditions.*

Parameter	Rating
Junction Temperature ( $T_J$ )	-40°C to +125°C



## Electrical Characteristics

T<sub>A</sub> = 25°C unless otherwise specified.

Symbol	Parameter	Diagram
I <sub>PP</sub>	Maximum Reverse Peak Pulse Current (100ns Transmission Line Pulse (TLP))	<p>The graph shows the reverse current (I) versus reverse voltage (V) for the device. The curve starts at a low current level for low voltages, then rises sharply as the voltage increases, indicating breakdown. Key points on the graph include: V<sub>CL</sub> (Clamping Voltage), V<sub>BR</sub> (Breakdown Voltage), V<sub>RWM</sub> (Working Peak Reverse Voltage), I<sub>R</sub> (Maximum Reverse Leakage Current), I<sub>T</sub> (Test Current), and I<sub>PP</sub> (Maximum Reverse Peak Pulse Current).</p>
V <sub>CL</sub>	Clamping Voltage @ I <sub>PP</sub>	
V <sub>SURGE_MAX</sub>	Peak Voltage at I <sub>SURGE</sub> = 2A (IEC61000-40-5 8/20μs pulse current)	
V <sub>RWM</sub>	Working Peak Reverse Voltage	
I <sub>R</sub>	Maximum Reverse Leakage Current	
V <sub>BR</sub>	Breakdown Voltage	
P <sub>PK</sub>	Peak Power Dissipation	
C <sub>J</sub>	Capacitance @ V <sub>R</sub> = 0 and f = 1MHz	

Device	Device Marking	V <sub>RWM</sub> (V) Max.	V <sub>BR</sub> (V)		I <sub>R</sub> (nA) Max.	V <sub>SURGE</sub> (V) Max.	V <sub>CL</sub> Max.			C <sub>J</sub> (pF)	
			Min.	Max.			I <sub>PP</sub> = 1A	I <sub>PP</sub> = 2A	I <sub>PP</sub> = 5A	Typ.	Max.
AOZ8831ADI-05	T	5.0	6.0	10.0	50.0	15.5	14.0	16.0	19.5	0.30	0.45

## Typical Performance Characteristics

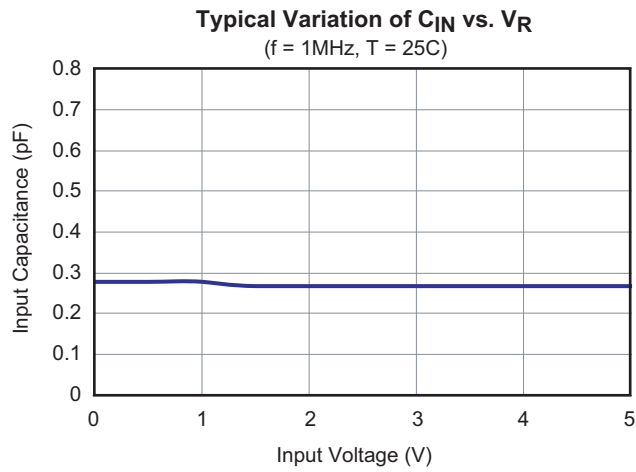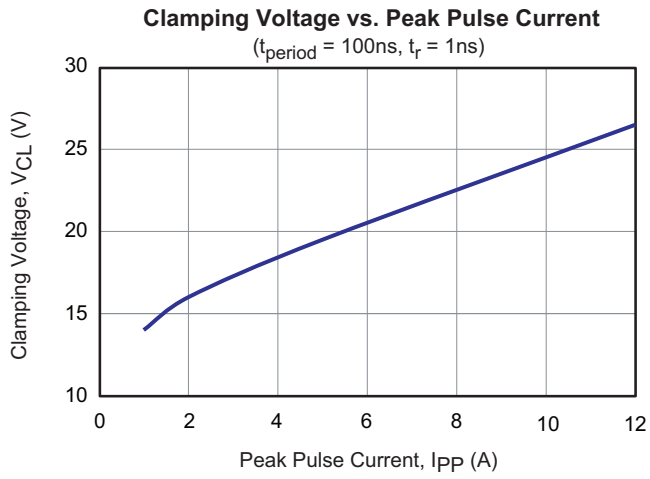

## LEGAL DISCLAIMER

Applications or uses as critical components in life support devices or systems are not authorized. AOS does not assume any liability arising out of such applications or uses of its products. AOS reserves the right to make changes to product specifications without notice. It is the responsibility of the customer to evaluate suitability of the product for their intended application. Customer shall comply with applicable legal requirements, including all applicable export control rules, regulations and limitations.

AOS' products are provided subject to AOS' terms and conditions of sale which are set forth at:

[http://www.aosmd.com/terms\\_and\\_conditions\\_of\\_sale](http://www.aosmd.com/terms_and_conditions_of_sale)

## LIFE SUPPORT POLICY

ALPHA AND OMEGA SEMICONDUCTOR PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.