

## SMA TO 26.5 GHz

### SMA Cable Assemblies

RF086, RF23C,  
RF25S, RF402,  
RF405, RF180, RF280



### VSWR

**RF086:** 1.30 max.  
**RF23C:** 1.30 max.  
**RF25S:** 1.60 max.  
**RF402:** 1.50 max.  
**RF405:** 1.35 max.  
**RF180:** 1.35 max.  
**RF280:** 1.35 max.

Additional connector options available.  
Contact [RFGroup@samtec.com](mailto:RFGroup@samtec.com)

SERIES	END 1 CONNECTOR	END 2 CONNECTOR	OVERALL LENGTH
<b>RF086</b> = (2.18 mm) .086" overshield DIA 23 AWG millimeter wave cable	<b>-01SP1*</b> = SMA Straight Plug		<b>-"XXXX"</b> = Overall Length in millimeters
<b>RF23C</b> = MCW-2350CU-01 millimeter wave cable with copper foil shield	<b>-01RP1*</b> = SMA Right-angle Plug (RF086, RF23C & RF25S not available)		-0100 (100 mm) 3.94" minimum (RF086, RF25S, RF402, & RF405)
<b>RF25S</b> = MWC-2550-01 microwave cable with 25 AWG solid FEP dielectric	<b>-01BJ1*</b> = SMA Bulkhead Jack (RF402 & RF405 not available)		-0152 (152 mm) 5.984" minimum (RF23C & RF180)
<b>RF402</b> = RG 402 (.141") 19 AWG semi-flexible microwave cable	<b>-01SB</b> = Straight Bulkhead Jack, Sealed (RF086 & RF23C only)		-0200 (200 mm) 7.87" minimum (RF280)
<b>RF405</b> = RG 405 (.086") 24 AWG semi-flexible microwave cable	*Remove last "1" from end connector when specifying RF086, RF23C, RF180 & RF280.		

### ALSO AVAILABLE

1.85 mm, 2.40 mm, 2.92 mm, SMPM = RF086  
2.40 mm, 2.92mm, SMPM = RF23C  
SMP = RF25S, RF405  
TNCA, N Type = RF180  
TNCA, N Type = RF280

### SMA Board Connectors


SMA-TH, SMA-SM,  
SMA-MT, SMA-EM

#### Cable Mates:

RF086, RF23C,  
RF25S, RF402,  
RF405, RF180, RF280



SMA	GENDER	TYPE	PLATING	ORIENTATION	TERMINATION
	<b>-J</b> = Jack	<b>-P</b> = PCB Mount	<b>-H</b> = 30 μ" (0.76 μm) Gold center contact, 3 μ" (0.08 μm) Gold outer contact	<b>-ST</b> = Straight	<b>-TH1</b> = Through-hole
			<b>-GF</b> = 10 μ" (0.25 μm) Gold center contact, 3 μ" (0.08 μm) Gold outer contact (-SM1 only)	<b>-RA</b> = Right-angle	<b>-SM1</b> = Surface Mount (-GF-RA only)
					<b>-EM1</b> = Edge Mount (-ST only)
					<b>-EM3</b> = Drop-in Edge Mount (-ST only)
					<b>-MT1</b> = Mixed Technology (-ST only)



-ST-TH1

### SMA Cable Connectors


PRF01



CONNECTORS FOR INDUSTRY STANDARD CABLES	
PRF01-P-C-EP-120C-SS	Harbour LL120
PRF01-J-C-EP-142-SS	Harbour LL142
PRF01-P-C-EP-142-SS	Harbour LL142
PRF01-P-C-EP-142-RS	Harbour LL142
PRF01-P-C-EP-142A-SS	Harbour SB142
PRF01-P-C-EP-335-SS	Harbour LL335
PRF01-P-C-EP-335A-SS	Harbour LL335i
PRF01-P-C-EP-190-SS	Semflex HP190
PRF01-P-C-EP-190-RS	Semflex HP190
PRF01-P-C-EP-305-SS	Semflex HP305
PRF01-P-C-EP-290-SS	Semflex LA290

For a complete list of SMA cable connectors,  
visit [www.samtec.com?PRF01](http://www.samtec.com?PRF01)

### INTERFACE STANDARD

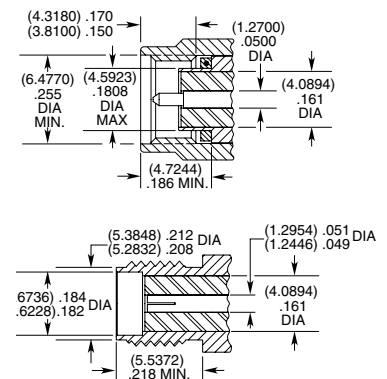

P-C = Cable Plug  
J-C = Cable Jack  
EP = Plating  
(50 μ" Gold center contact,  
passivated outer contact)  
SS = Straight, Solder Clamp  
RS = Right-angle, Solder Clamp